



1. THE B-PERMITTEE SHALL BE RESPONSIBLE FOR LABOR AND MATERIAL INVOLVED IN THE REMOVAL, MARKOUT, AND INSTALLATION OF ALL STRIPING, PAVEMENT MARKINGS, CURB MARKINGS, AND SIGNS SHOWN HEREON. REMOVAL OF MARKINGS SHALL BE PERFORMED BEFORE MARKOUT AND INSTALLATION OF NEW STRIPING, AND SHALL BE BY WET SANDBLASTING/GRINDING IN ACCORDANCE WITH LADOT SPECIFICATION NO. 76-016-10. MARKOUT SHALL BE BY HEAVY PAINT BRUSH MARKINGS OR SPRAY PAINT OVER A PULLED ROPE IN THE RESPECTIVE WHITE OR YELLOW COLORS OF THE PROPOSED STRIPING. STRIPING AND PAVEMENT MARKINGS SHALL BE IN HOT APPLIED ALKYD THERMOPLASTIC IN ACCORDANCE WITH LADOT SPECIFICATIONS NOS. 51-005-10 AND 76-012-15.

- A. TEN (10) WORKING DAYS IN ADVANCE OF MARKOUT.
- B. UPON COMPLETION OF MARKOUT (INCLUDING ANY MARKOUT CORRECTIONS) FOR INSPECTION AND APPROVAL.
- C. UPON COMPLETION OF THERMOPLASTIC STRIPING (INCLUDING ANY THERMOPLASTIC STRIPING CORRECTIONS) FOR INSPECTION AND FINAL STRIPING APPROVAL.

3. DURING ALL PHASES OF CONSTRUCTION, TEMPORARY RAISED OVERLAY PAVEMENT MARKERS SHALL BE MAINTAINED ADJACENT TO ANY TEMPORARY CENTERLINE, MARKOUT CENTERLINE, OR SCAR OF A SANDBLASTED CENTERLINE, AS APPLICABLE, AS PER LADOT STANDARD PLAN NO. S-453.0.
4. THE FIELD CONDITIONS SHOWN AS EXISTING ON THIS PLAN MAY CHANGE BETWEEN THE PLAN APPROVAL DATE AND THE IMPLEMENTATION DATE. THE CONTRACTOR MAY BE REQUIRED TO INSTALL OR REMOVE STRIPING, PAVEMENT MARKINGS, CURB MARKINGS, SIGNS OR OTHER TRAFFIC CONTROL DEVICES BEYOND THOSE INDICATED ON THIS PLAN, IN ORDER TO FACILITATE THESE CHANGES IN FIELD CONDITIONS AND/OR TO BE IN COMPLIANCE WITH LADOT STANDARDS AND SPECIFICATIONS.
5. IF THIS PLAN HAS NOT BEEN INSTALLED WITHIN TWO (2) YEARS OF THE APPROVAL DATE, IT SHALL BE RESUBMITTED TO LADOT PUBLIC IMPROVEMENTS SECTION FOR RE-APPROVAL PRIOR TO PROCEEDING TO CONSTRUCTION.
6. INSTALL PEDESTRIAN BARRICADE PER S-454.2.

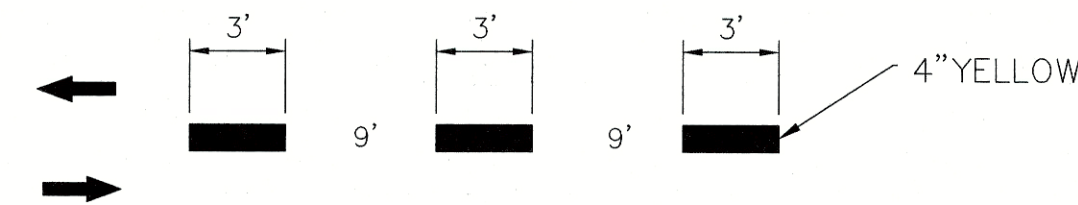

DETAIL "A"
NO SCALE

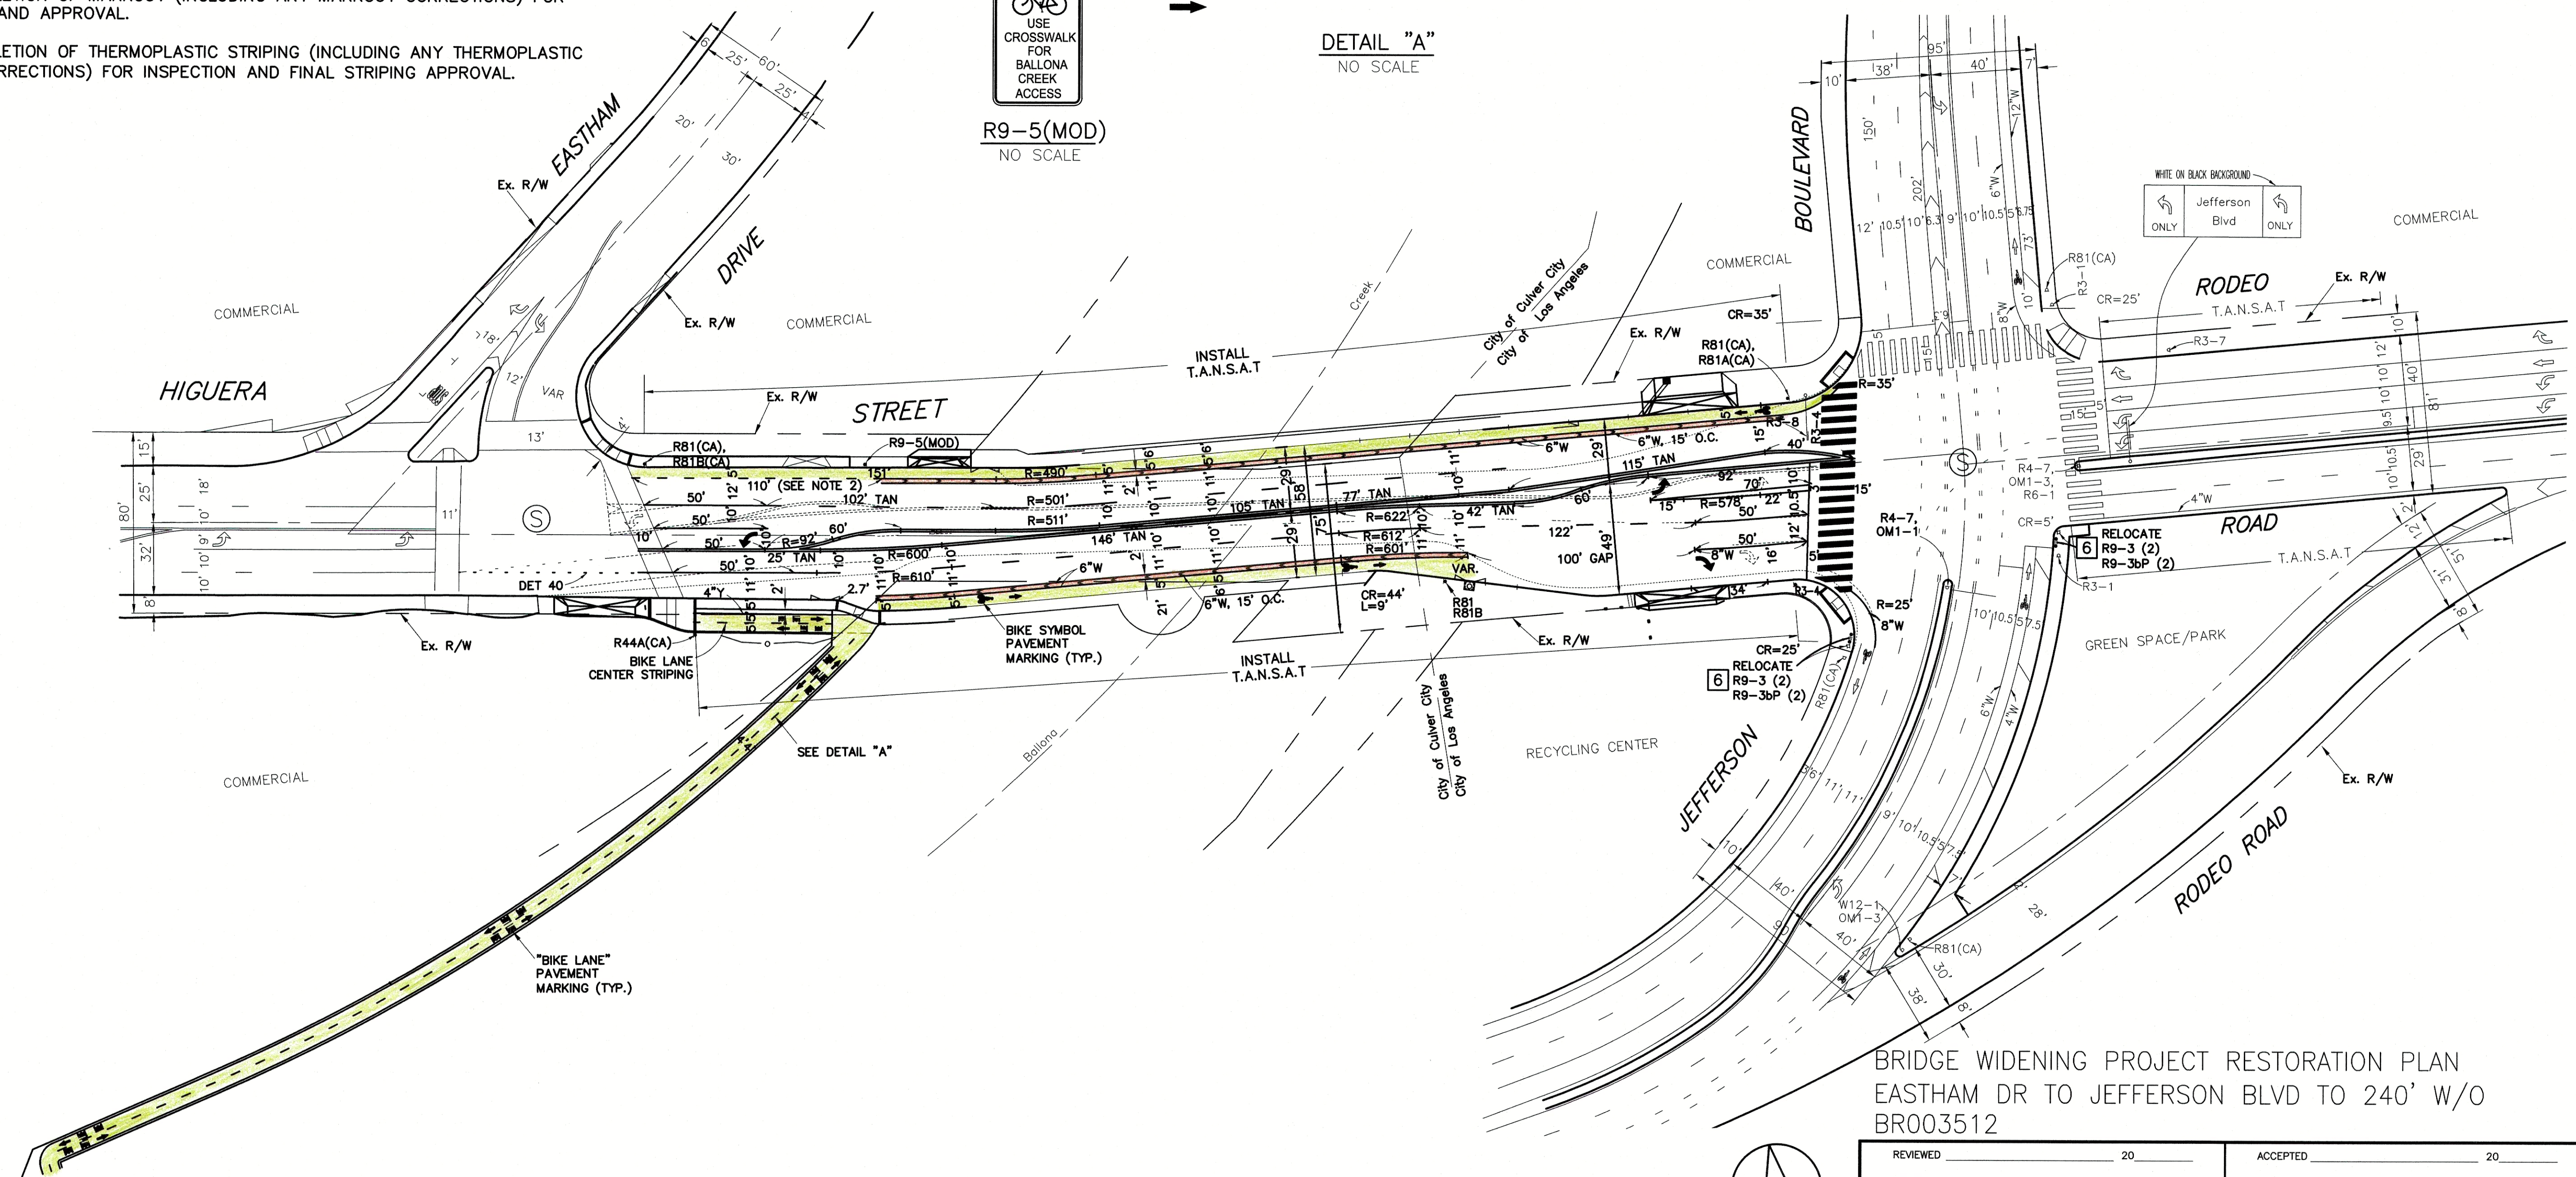


BRIDGE WIDENING PROJECT RESTORATION PLAN
EASTHAM DR TO JEFFERSON BLVD TO 240' W/O
BR003512

SCALE: 1"=40

PLANS PREPARED BY:
P S O M A S
555 South Flower Street, Suite 4300
Los Angeles, CA 90071
(213) 223-1400 Fax (213) 223-1444


ARIEF NAFTALI, P.E., T.E.

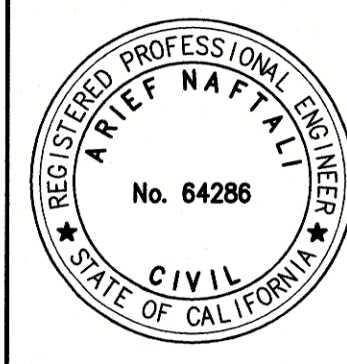

11/24/2018
DATE

CULVER CITY PUBLIC
WORKS DEPARTMENT

ACCEPTED BY :

SAMMY ROMO, P.E.
ASSOCIATE ENGINEER

DATE: _____

REVIEWED _____ 20_____ _____ Transportation Engineer		ACCEPTED _____ 20_____ _____ Senior Transportation Engineer	
INSTALLATION DATES _____ _____ MARKOUT BEGAN: _____ _____ MARKOUT COMPLETED: _____ _____ STRIPING COMPLETED: _____ References: A-6241, FIELD CHECK 02-03-15		CITY OF LOS ANGELES DEPARTMENT OF TRANSPORTATION SELETA J. REYNOLDS, GENERAL MANAGER HIGUERA STREET EASTHAM DR TO JEFFERSON BLVD	
Thomas Guide 672, JI	District Hollywood— Wilshire	PROJECT NO. BR003512	DRAWING NO. A-6576
		1 1	

SCALES

HORIZ. 1"=
VERT. 1"=

SHEET 9 OF 43

INDEX NUMBER



BASE	BY	DATE	BY	DATE
CHECK			SUPERVISOR	
DESIGN			DISTRICT	1/15/15
			SIGNALS	JS
NO.	REVISION DESCRIPTION	T.E./SR. T.E.	PRINCIPAL T.E.	DATE