



Plotted By: Dong, Vivian Sheet: SEPULVEDA BLVD AT JEFFERSON BLVD AND PLAYA ST September 30, 2021 04:57:24pm K:\LOT-TPD\ITS\099417006 - Culver City LAMA CMS Design\CADD\Plan Sheets\099417006-CMS.dwg This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Kinley-Horn and Associates, Inc. shall be without liability to Kinley-Horn and Associates, Inc.

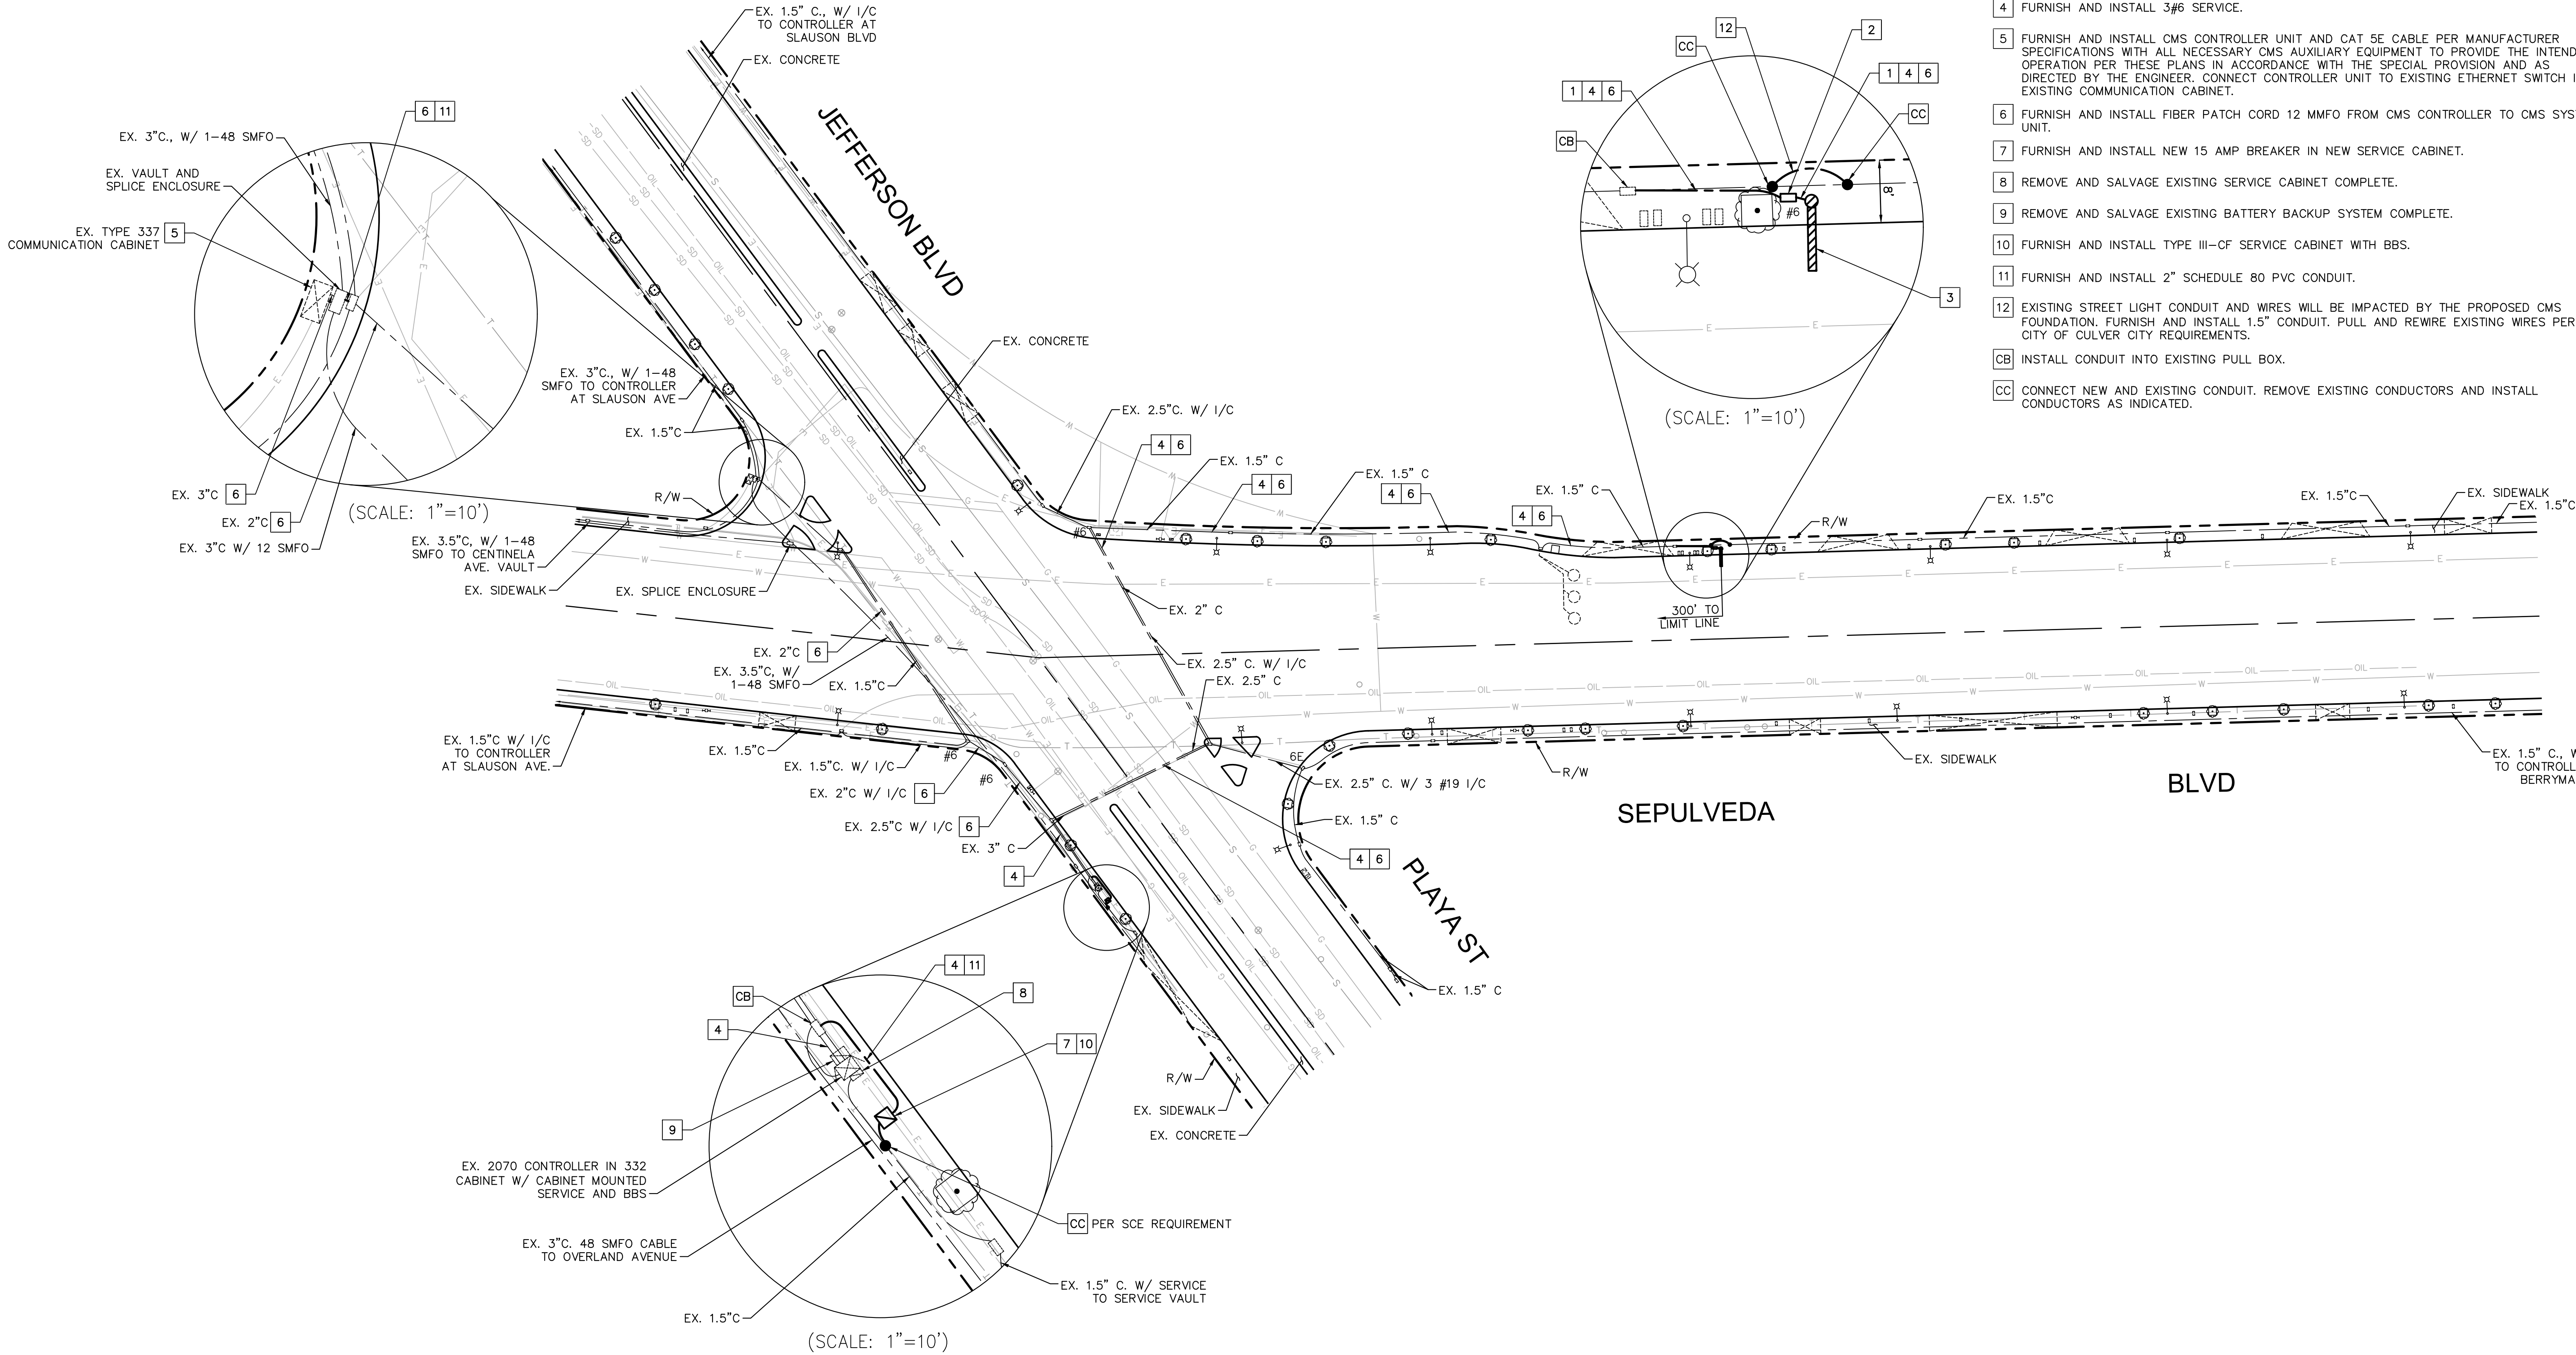

CONSTRUCTION NOTES:

- 1 FURNISH AND INSTALL 3" SCHEDULE 80 PVC CONDUIT.
 - 2 FURNISH AND INSTALL NEW #6 PULL BOX AS SHOWN.
 - 3 FURNISH AND INSTALL CHANGEABLE MESSAGE SIGN (CMS) [VC6-60X150-15.85-RGB-SF] PER MANUFACTURER'S SPECIFICATIONS. FURNISH AND INSTALL CMS POLE AND SUPPORT STRUCTURE AND FOUNDATION. SEE CITY OF LOS ANGELES DEPARTMENT OF TRANSPORTATION SHEET S-92.4 FOR POLE AND FOUNDATION DETAILS.
 - 4 FURNISH AND INSTALL 3#6 SERVICE.
 - 5 FURNISH AND INSTALL CMS CONTROLLER UNIT AND CAT 5E CABLE PER MANUFACTURER SPECIFICATIONS WITH ALL NECESSARY CMS AUXILIARY EQUIPMENT TO PROVIDE THE INTENDED OPERATION PER THESE PLANS IN ACCORDANCE WITH THE SPECIAL PROVISION AND AS DIRECTED BY THE ENGINEER. CONNECT CONTROLLER UNIT TO EXISTING ETHERNET SWITCH IN EXISTING COMMUNICATION CABINET.
 - 6 FURNISH AND INSTALL FIBER PATCH CORD 12 MMFO FROM CMS CONTROLLER TO CMS SYSTEM UNIT.
 - 7 FURNISH AND INSTALL NEW 15 AMP BREAKER IN NEW SERVICE CABINET.
 - 8 REMOVE AND SALVAGE EXISTING SERVICE CABINET COMPLETE.
 - 9 REMOVE AND SALVAGE EXISTING BATTERY BACKUP SYSTEM COMPLETE.
 - 10 FURNISH AND INSTALL TYPE III-CF SERVICE CABINET WITH BBS.
 - 11 FURNISH AND INSTALL 2" SCHEDULE 80 PVC CONDUIT.
 - 12 EXISTING STREET LIGHT CONDUIT AND WIRES WILL BE IMPACTED BY THE PROPOSED CMS FOUNDATION. FURNISH AND INSTALL 1.5" CONDUIT. PULL AND REWIRE EXISTING WIRES PER THE CITY OF CULVER CITY REQUIREMENTS.
- CB INSTALL CONDUIT INTO EXISTING PULL BOX.
- CC CONNECT NEW AND EXISTING CONDUIT. REMOVE EXISTING CONDUCTORS AND INSTALL CONDUCTORS AS INDICATED.

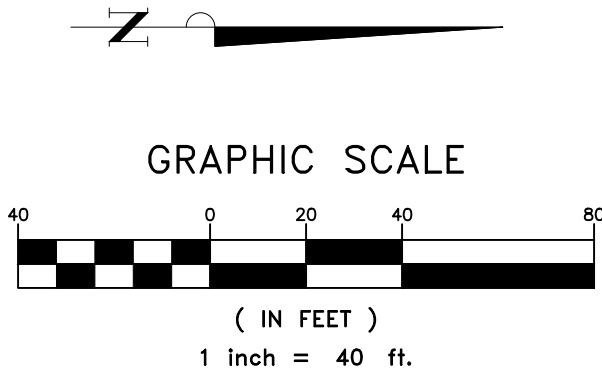

NO.	REVISION	BY	APPR.	DATE



PLAN PREPARED BY:

Kimley»Horn

© 2021 KIMLEY-HORN AND ASSOCIATES, INC.
660 S. Figueroa Street, Ste. 2050
Los Angeles, California 90017 (213) 261-4040

CITY OF CULVER CITY PUBLIC WORKS DEPARTMENT ENGINEERING DIVISION			
REAL-TIME MOTORIST INFORMATION DYNAMIC MESSAGE SIGN SEPULVEDA BLVD AT JEFFERSON BLVD AND PLAYA ST			
DESIGNED BY MB	DATE 4/20/21	HORIZ: AS SHOWN	CHECKED BY DATE
DRAWN BY VC	DATE 4/20/21	VERT: AS SHOWN	APPROVED BY CHARLES D. HERBERTSON, P.E., L.S.
FIELD BOOK REFERENCE	KHA PROJECT NUMBER 099417006	CITY ENGINEER R.C.E. NO. Plan No. _____	
Sheet 1 Of 1 Sheets			PLAN NO.